


BROAD 472-01

BSC Filters Limited
10-11 Stirling Park, Bleriot Way
Clifton Moor, York, YO30 4WU. UK
Telephone: +44 (0) 1904 694250
E-mail: sales@bscfilters.com
Web-site: www.bscfilters.com

COMBLINE BANDPASS FILTER

For Satellite Tracking and Command uplinks as well as downlink Data and Telemetry, the BROAD 472 filter is ideally suited as it offers full band coverage, low insertion loss, high power handling suitable for Tx uplinks and good broadband rejections. Finished in gloss white it is ideally suited to external antenna mounting.

Passband:	2.025 to 2.29 GHz
Insertion Loss:	0.5 dB max
Return Loss:	16 dB min
Rejection from DC to 1.94 GHz:	40 dB min
Rejection from 2.4 to 4.0 GHz:	40 dB min
Power Handling:	5 W max
Operating temperature:	-40 to 85°C
Connectors:	N-Type Female
External Finish:	Gloss White

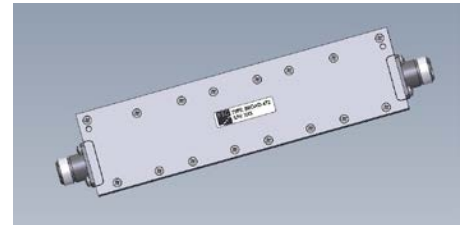

Outline:

